

Vetro Slide Fold Stack: Rail System



Product Features

- Achieves wide openings without vertical frames in interior and exterior situations.
- Openings up to 6m in each direction to facilitate up to 12m overall opening area.
- Suits 10, 12 or 15mm Toughened Safety Glass.
- Can be centrally-hung or side-hung to manage the accumulation of panel storage.
- Maximum door sash 3000 x 1000mm or 80kg.
- Continuous support for the glass doors with a complete rail system which requires no holes in the glass.
- A clear floor passageway is possible without a floor track.
- Top and Bottom Rails have the ability to add brush seals to reduce wind and sound intrusion.
- Can be configured for a range of opening formats including an externally opening door.
- Manufactured from aluminium and available in a range of custom finishes.





For specific glass and layout detail please refer to Technical section of our website.





Vetro Slide Fold Stack: Rail System

Typical Layouts - Side Hung


2 Panels




2 Panels + 1 Fixed Door




4 Panels





4 Panels + 1 Fixed Door

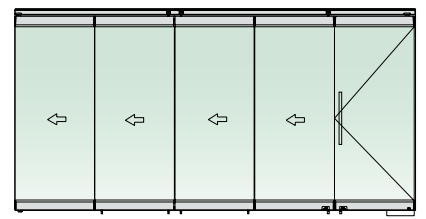

6 Panels

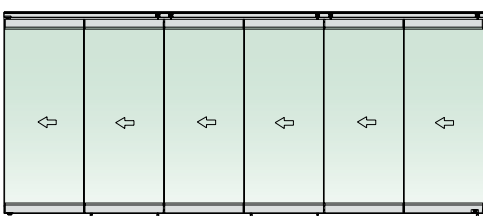

4 Panels, two directional





Note:

The options are not limited to those shown and are a guide only. For specific design options, or for a specific project please contact us.



Max Door Size: 2800 x 900mm

Typical Layouts - Centrally Hung


3 Panels



4 Panels



3 Panels + 1 Fixed Door

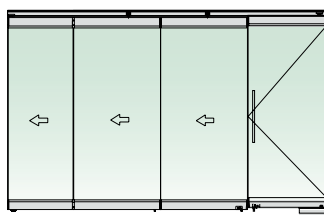

Note:

The options are not limited to those shown and are a guide only. For specific design options, or for a specific project please contact us.

Max Door Size: 3000 x 1000mm

Vetro SlideFold Stack Patch Fittings



Product Features

- Ideal for creating wide openings for interior situations.
- The smooth sliding operation of the Vetro Slide-Fold-Stack System opens up existing rooms for expanding the area, or to close it off as required.
- Stacks conveniently out of the way when opened.
- Created using Patch Fittings to provide a maximum clear visual opening.
- Openings up to 6m in each direction, so can facilitate up to 12m openings.
- Suitable for 10mm-12mm Toughened Safety Glass.
- Maximum door sash up to 2400 x 900mm or 70kg with a single top and bottom Patch, or 3000mm x 1000mm with an additional UW fdWPatch.
- A guide rail system in the floor provides additional support and security.
- Can be configured for a range of opening formats including an independently opening fixed door.
- Manufactured from aluminium and available in a range of finishes.




 **Vetro Raccordi**


Vetro Slide Fold Stack Patch Fittings

Typical Layouts


2 Panels

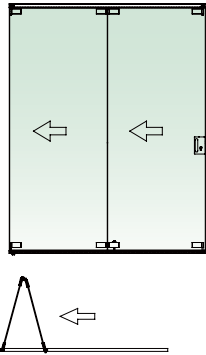


4 Panels

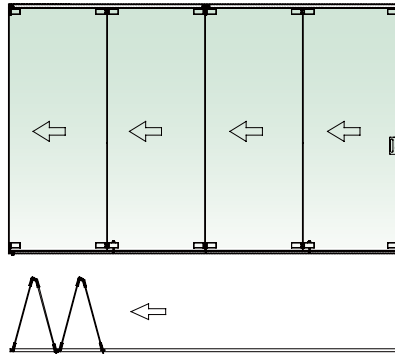


3 Panels

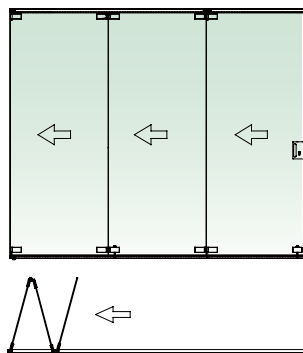


5 Panels

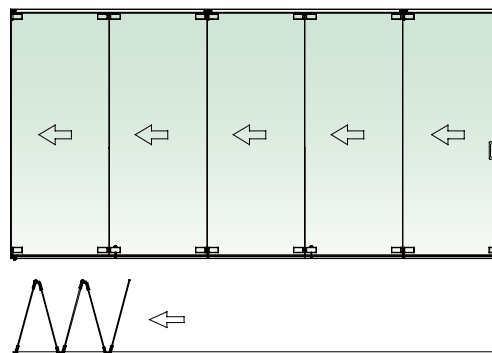


4 Panels, two directional

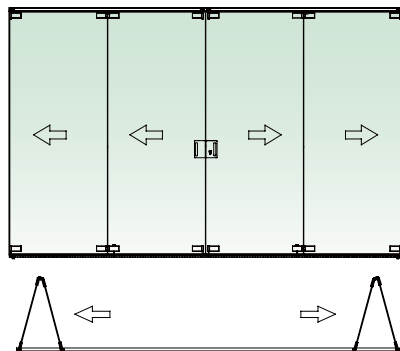

6 Panels, two directional

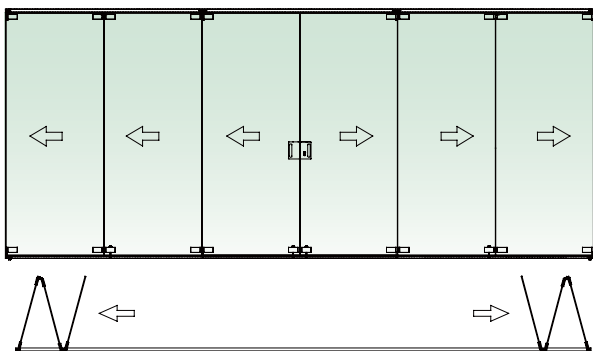

8 Panels, two directional

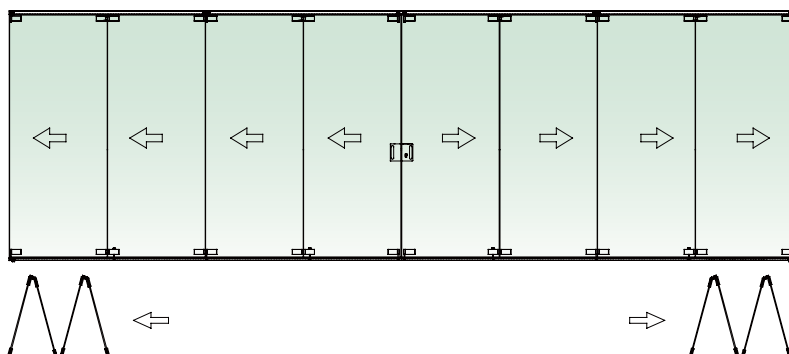

Note:

The options are not limited to those shown and are a guide only. For specific design options, or for a specific project please contact us.

Max door size

3000 x 1000mm with an additional centre patch, 2400 x 900mm with a single top and bottom patch.